
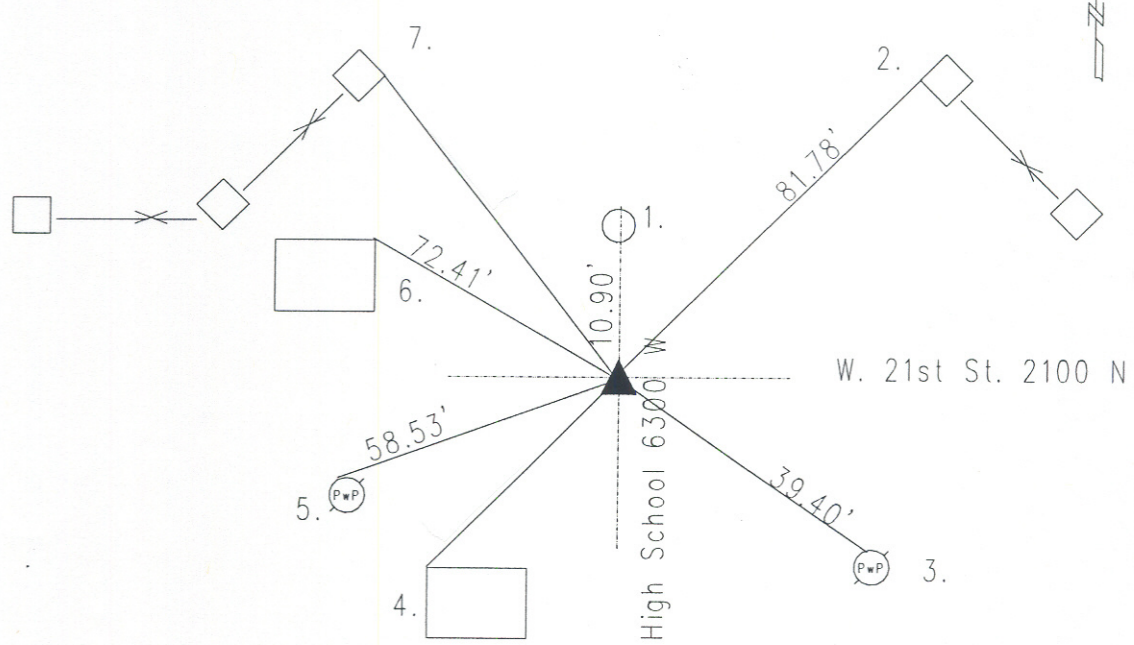


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 36 TOWNSHIP 16 RANGE 2
DATE: 8-11-02 9-18-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 11-1-96
IN. S.P.C. E ZONE NAD '83
NAME: 16023601
N: 504840.5642(m)
E: 48341.9301(m)

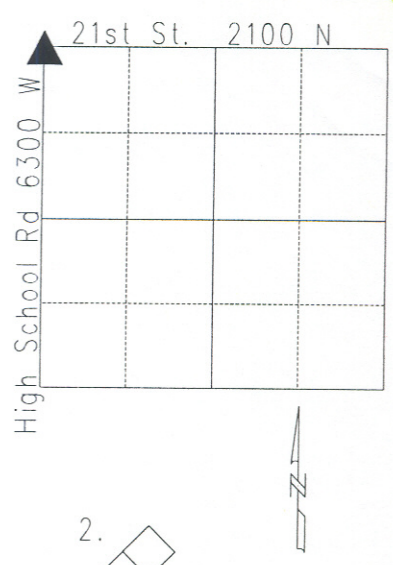

Original post set 1820 by Laughlin with witness: 12" buckeye N 41 E 11 links; 10" dogwood S 11 W 2 links per Marion County Atlas pg. 3. Fatout 10-28-1881 called no stone or witness per Wayne Township Legal Survey Book pg. 56. MCSO 3-43 called square bolt in concrete. MCSO 1954 called the same. Long 7-17-62 called the same. McLand 5-28-70 called same 14' down. Wilcoxon 1984 called the same. Greene 11-14-86 called the same. Gries 2-18-87 called PK nail per 1943 Legal Survey. Whiteside 4-24-96 called mag nail set. Excavated by Wilcoxon 11-1-96 and Harrison set. Re-tied 8-11-02 by Wilcoxon. 16023601

REF.	DISTANCE	DESCRIPTION
1.	10.90'	Due N to shaft of copperweld
2.	81.78'	Westerly corner of brick column
3.	39.40'	PK nail N PwP#214-454 B 4"up
4.	54.29'	NW corner of concrete street light base
5.	58.53'	Mag nail NW PwP#446-453 B 18"up
6.	72.41'	NE corner of metal signal box
7.	78.57'	Easterly corner of brick column